



INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ




I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

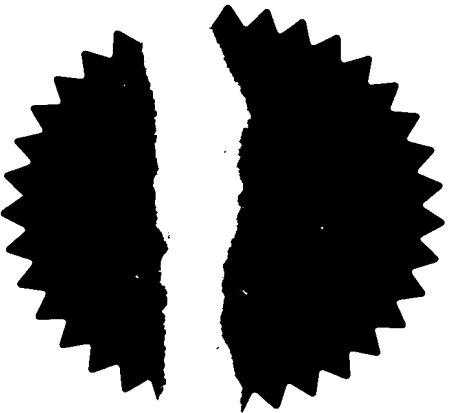

Signed

Dated 4 April 2001



Patents Form 1/77

Patents Act 1977  
(rule 16)

THE PATENT OFFICE  
A  
09 MAY 2000  
RECEIVED BY FAX

The  
Patent  
Office

09MAY00 E535335-1 D01104  
P01/7700 0.00-0011115.3

The Patent Office

Cardiff Road  
Newport  
Gwent NP9 1RH

# Request for grant of a patent

See the notes on the back of this form. You can also get  
an explanatory leaflet from the Patent Office to help  
you fill in this form.

1. Your reference

2000M005

2. Patent applic  
(The Patent Off)

0011115.3

09 MAY 2000

3. Full name, address and postcode of the or of  
each applicant (underline all surnames)

Infineum International Limited  
Building 1220 Park View  
Arlington Business Park  
Theale, Reading. RG7 4SA  
United Kingdom

7880701002

Patents ADP number (if you know it)

If the applicant is a corporate body, give the  
country/state of its incorporation

Reading, United Kingdom

4. Title of the invention

LUBRICATING OIL COMPOSITIONS

5. Name of your agent (if you have one)

MANSELL, Keith R

"Address for service" in the United Kingdom  
to which all correspondence should be sent  
(including the postcode)

Infineum UK Limited  
PO Box 1,  
Milton Hill,  
Abingdon,  
Oxfordshire, OX13 6BB  
United Kingdom

7629793001

Patents ADP number (if you know it)

6. If you are declaring priority from one or more  
earlier patent applications, give the country  
and the date of filing of the or of each of these  
earlier applications and (if you know it) the or  
each application number

Country

Priority application number  
(if you know it)Date of filing  
(day / month / year)7. If this application is divided or otherwise  
derived from an earlier UK application,  
give the number and the filing date of  
the earlier application

Number of earlier application

Date of filing  
(day / month / year)8. Is a statement of inventorship and of right  
to grant of a patent required in support of  
this request? (Answer 'Yes' if:

- a) any applicant named in part 3 is not an inventor, or
  - b) there is an inventor who is not named as an  
applicant, or
  - c) any named applicant is a corporate body.
- See note (d))

Patents Form 1/7

## Patents Form 1/77

Enter the number of sheets for any of the following items you are filing with this form.  
Do not count copies of the same document

Continuation sheets of this form	
<b>THE PATENT OFFICE</b> <b>A</b> <b>09 MAY 2000</b> <b>RECEIVED BY FAX</b>	Description
	Claim(s)
	Abstract
	Drawing(s)

10

2

1

0

10. If you are also filing any of the following, state how many against each item.

Priority documents	-
Translations of priority documents	-
Statement of inventorship and right to grant of a patent (Patents Form 7/77)	-
Request for preliminary examination and search (Patents Form 9/77)	1
Request for substantive examination (Patents Form 10/77)	1
Any other documents (please specify)	NO

11.

I/We request the grant of a patent on the basis of this application.

Signature

K. R. Mansell

Date

MANSELL, Keith R

08 MAY 2000

12. Name and daytime telephone number of person to contact in the United Kingdom

MANSELL, Keith R  
01235 549843**Warning**

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

**Notes**

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

Patents Form 1/77

2000M005

Lubricating Oil Compositions

5 This invention relates to a trunk piston marine engine lubricating composition for a medium speed 4-stroke compression-ignited (diesel) marine engine and lubrication of such a trunk piston engine.

10 The term "marine" does not restrict the engines to those used in water-borne vessels; as is understood in the art, it also includes those for auxiliary power generation applications and for main propulsion stationary land-based engines of the above types for power-generation.

15 One problem associated with trunk piston engines is that their manufacturers commonly design them to use a variety of diesel fuels, ranging from good quality high distillate fuel with low sulfur and low asphaltene content to poorer quality intermediate or heavy fuel such as "Bunker C" or residual fuel oil with generally higher sulfur and higher asphaltene content. Lubricants used in such engines often become contaminated with asphaltene components from the fuel, leading to cleanliness problems in service, sometimes referred to as "black paint".

20 Lubricating oils compositions (or lubricants) for trunk piston engines are known and may be referred to as trunk piston engine oils or TPEO's. They are known to include, as additives to improve their performance, ashless dispersants and overbased detergents.

25 EP-A-0-662 508 meets the above problem by describing use of a composition that includes a hydrocarbyl-substituted phenate concentrate having a TBN greater than 300, and at least one of a hydrocarbyl-substituted salicylate and a hydrocarbyl-substituted sulphonate. However, the composition also includes, 30 apparently, a dispersant since the EP states that lubricating oils for medium speed diesel engines typically comprise dispersants to minimise deposit formation in various parts of the engine.

35 Thus, EP-A-0-662 508 requires several additives to meet the problem, thus increasing cost in a cost-sensitive environment. It has now surprisingly been found that a dispersant-free TPEO, wherein the metal detergent is of the salicylate type only, provides excellent performance in several respects, i.e. without the need for certain additional additives as required by the prior art.

2000M005

Accordingly, a first aspect of the present invention is trunk piston marine engine lubricating oil composition for a medium speed compression-ignited (diesel) marine engine wherein the composition is dispersant-free and has a Total Base Number (TBN) of 25 or greater, and comprises:

- (A) an oil of lubricating viscosity, in a major amount, and added thereto:
- (B) an oil-soluble overbased metal detergent additive consisting of, as the sole metal detergent, one or more hydrocarbyl - substituted salicylates, in a minor amount, and
- (C) an antiwear additive comprising a dihydrocarbyl dithiophosphate metal salt, in a minor amount

A second aspect of the present invention is the use of additives (B) and (C) as defined in the first aspect of the invention in a dispersant-free trunk piston marine engine oil lubricating composition having a TBN of 25 or greater to (a) suspend asphaltene components in the composition, or (b) control piston deposits, or both (a) and (b), when used in a medium speed compression - ignited marine engine.

A third aspect of the present invention is a method of lubricating a medium speed compression-ignited marine engine which comprises supplying to the engine the trunk piston marine engine oil lubricating composition according to the first aspect of the invention.

"Major amount" means in excess of 50 mass % of the composition.

"Minor amount" means less than 50 mass % of the composition, both in respect of the stated additive and in respect of the total mass % of all the additives present in composition, reckoned as active ingredient of the additive or additives.

"Comprises or comprising" or cognate words is taken to specify the presence of stated features, steps, integers or components, but does not preclude the presence or addition of one or more other features, steps, integer components or groups thereof.

"TBN" (Total Base Number) is as measured by ASTM D2896, and the viscosity index is as defined by ASTM D2270.

2000M005

The features of the invention will now be discussed in more detail below.

### Marine Diesel Engines

- 5 The lubricating oil composition of the present invention may be suitable for use in a 4-stroke trunk piston engine having an engine speed of 200 to 2,000 e.g. 400 to 1,000, rpm, and a brake horse-power (BHP) per cylinder of 50 to 3,000, preferably 100 to 2,000.

#### 10 Lubricating Oil Composition

- Preferably, the TBN of the lubricant composition is in the range of from 25 to 100, such as from 25 or 30 to 60, preferably 40 to 55. Preferably, the viscosity index of the lubricant composition is at least 90, more preferably at least 95, and at most  
15 140 such as 120, preferably 110. A preferred viscosity index range is from 95 to 115.

- The lubricant composition may, for example, have a kinematic viscosity at 100°C (as measured by ASTM D445) of at least 9, preferably at least 13, more preferably  
20 in the range of from 14 to 24, for example from 14 to 22, mm<sup>2</sup>s<sup>-1</sup>.

#### (A) Oil of Lubricating Viscosity

- The oil of lubricating viscosity (sometimes referred to as lubricating oil) may be  
25 any oil suitable for the lubrication of a trunk piston engine. The lubricating oil may suitably be an animal, a vegetable or a mineral oil. Suitably the lubricating oil is a petroleum-derived lubricating oil, such as a naphthenic base, paraffinic base or mixed base oil. Alternatively, the lubricating oil may be a synthetic lubricating oil. Suitable synthetic lubricating oils include synthetic ester lubricating oils, which oils  
30 include diesters such as di-octyl adipate, di-octyl sebacate and tridecyl adipate, or polymeric hydrocarbon lubricating oils, for example liquid polyisobutene and poly-alpha olefins. Commonly, a mineral oil is employed. The lubricating oil may generally comprise greater than 60, typically greater than 70, mass % of the composition, and typically have a kinematic viscosity at 100°C of from 2 to 40, for  
35 example for 3 to 15, mm<sup>2</sup>s<sup>-1</sup> and a viscosity index of from 80 to 100, for example from 90 to 95.

2000M005

Another class of lubricating oils is hydrocracked oils, where the refining process further breaks down the middle and heavy distillate fractions in the presence of hydrogen at high temperatures and moderate pressures. Hydrocracked oils typically have a kinematic viscosity at 100°C of from 2 to 40, for example from 3 to 15, mm<sup>2</sup>s<sup>-1</sup> and a viscosity index typically in the range of from 100 to 110, for example from 105 to 108.

The term 'brightstock' as used herein refers to base oils which are solvent-extracted, de-asphalted products from vacuum residuum generally having a kinematic viscosity at 100°C of from 28 to 36 mm<sup>2</sup>s<sup>-1</sup> and are typically used in a proportion of less than 30, preferably less than 20, more preferably less than 15, most preferably less than 10, such as less than 5, mass %, based on the mass of the composition.

The compositions are free of dispersants in the sense of containing substantially no dispersant. A dispersant is an additive for a lubricating composition whose primary function is to hold solid and liquid contaminants in suspension, thereby passivating them and reducing engine deposits at the same time as reducing sludge depositions. Thus, for example, a dispersant maintains in suspension oil-insoluble substances that result from oxidation during use of the lubricating oil, thus preventing sludge flocculation and precipitation or deposition on metal parts of the engine.

A noteworthy class of dispersants are "ashless", meaning a non-metallic organic material that forms substantially no ash on combustion, in contrast to metal-containing, hence ash-forming, materials. Ashless dispersants comprise a long chain hydrocarbon with a polar head, the polarity being derived from inclusion of, e.g. an O, P or N atom. The hydrocarbon is an oleophilic group that confers oil-solubility, having for example 40 to 500 carbon atoms. Thus, ashless dispersants may comprise an oil-soluble polymeric hydrocarbon backbone having functional groups that are capable of associating with particles to be dispersed.

#### (B) Overbased Metal Detergent

A detergent is an additive that reduces formation of piston deposits, for example high-temperature varnish and lacquer deposits, in engines; it has acid-neutralising properties and is capable of keeping finely divided solids in suspension. It is



2000M005

based on metal "soaps", that is metal salts of acidic organic compounds, sometimes referred to as surfactants, which, is the present case, is salicylic acid.

5 The detergent comprises a polar head with a long hydrophobic tail, the polar head comprises a metal salt of the salicylic acid. Large amounts of a metal base are included by reacting an excess of a metal compound, such as an oxide or hydroxide, with an acidic gas such as carbon dioxide to give an overbased detergent which comprises neutralised detergent as the other layer of a metal base (e.g. carbonate) micelle. The overbased detergents of this invention may  
10 have a TBN in the range of 60 to 600, preferably 100 to 450, more preferably 160 to 400.

The metal may be an alkali or alkaline earth metal, e.g., sodium, potassium, lithium, calcium, and magnesium. Calcium is preferred.

15 Surfactants for the surfactant system of the overbased metal detergents contain at least one hydrocarbyl group, for example, as a substituent on an aromatic ring. The term "hydrocarbyl" as used herein means that the group concerned is primarily composed of hydrogen and carbon atoms and is bonded to the  
20 remainder of the molecule via a carbon atom, but does not exclude the presence of other atoms or groups in a proportion insufficient to detract from the substantially hydrocarbon characteristics of the group. Advantageously, hydrocarbyl groups in surfactants for use in accordance with the invention are aliphatic groups, preferably alkyl or alkylene groups, especially alkyl groups, which  
25 may be linear or branched. The total number of carbon atoms in the surfactants should be at least sufficient to impact the desired oil-solubility.

Salicylates used in accordance with the invention may be non-sulfurized or sulfurized, and may be chemically modified and/or contain additional substituents,  
30 Process for sulfurizing a hydrocarbyl-substituted salicylic acid are well known to those skilled in the art. Salicylic acids are typically prepared by the carboxylation, by the Kolbe-Schmitt process, of phenoxides, and in that case, will generally be obtained, normally in a diluent, in admixture with uncarboxylated phenol.

35 Preferred substituents in oil-soluble salicylic acids from which salicylates in accordance with the invention may be derived are alkyl substituents. In alkyl-substituted salicylic acids, the alkyl groups advantageously contain 5 to 100, preferably 9 to 30, especially 14 to 20, carbon atoms. Where there are more than

2000M005


one alkyl groups, the average number of carbon atoms in all of the alkyl groups is preferably at least 9 to ensure adequate oil-solubility.

The salicylates may be used in a proportion in the range of 0.5 to 30, preferably 2 to 15 or to 20, mass % based on the mass of the lubricating oil composition.

### (C) Antiwear Additive

As stated, dihydrocarbyl dithiophosphate metal salts constitute the anti-wear additives in the present invention. The metal in the dihydrocarbyl dithiophosphate metal may be an alkali or alkaline earth metal, or aluminium, lead, tin, molybdenum, manganese, nickel or copper. Zinc salts are preferred, preferably in the range of 0.1 to 1.5, preferably 0.5 to 1.3, mass %, based upon the total mass of the lubricating oil composition. They may be prepared in accordance with known techniques by first forming a dihydrocarbyl dithiophosphoric acid (DDPA), usually by reaction of one or more alcohol or a phenol with  $P_2S_5$  and then neutralizing the formed DDPA with a zinc compound. For example, a dithiophosphoric acid may be made by reacting mixtures of primary and secondary alcohols. Alternatively, multiple dithiophosphoric acids can be prepared comprising both hydrocarbyl groups that are entirely secondary in character and hydrocarbyl groups that are entirely primary in character. To make the zinc salt, any basic or neutral zinc compound may be used but the oxides, hydroxides and carbonates are most generally employed. Commercial additives frequently contain an excess of zinc due to use of an excess of the basic zinc compound in the neutralisation reaction.

The preferred zinc dihydrocarbyl dithiophosphates are oil-soluble salts of dihydrocarbyl dithiophosphoric acids and may be represented by the following formula:



where R and R' may be the same or different hydrocarbyl radicals containing from 1 to 18, preferably 2 to 12, carbon atoms and including radicals such as alkyl, alkenyl, aryl, arylalkyl, alkaryl and cycloaliphatic radicals. Particularly preferred as R and R' groups are alkyl groups of 2 to 8 carbon atoms. Thus, the radicals may, for example, be ethyl, n-propyl, i-propyl, n-butyl, i-butyl, s-c-butyl, amyl, n-hexyl, i-hexyl, n-octyl, decyl, dodecyl, octadecyl, 2-ethylehexyl, phenyl, butylphenyl,

2000M005

cyclohexyl, methylcyclopentyl, propenyl, butenyl. In order to obtain oil-solubility, the total number of carbon atoms (i.e., in R and R') in the dithiophosphoric acid will generally be 5 or greater. The zinc dihydrocarbyl dithiophosphate can therefore comprise zinc dialkyl dithiophosphates.

5

Other additives such as pour point depressants, anti-foamants, and/or demulsifiers may be provided, if necessary.

10

It may be desirable, although not essential, to prepare one or more additive packages or concentrates comprising the additives, whereby additives (B) and (C) can be added simultaneously to the base oil to form the lubricating oil composition. Dissolution of the additive package(s) into the lubricating oil may be facilitated by solvents and by mixing accompanied with mild heating, but this is not essential. The additive package(s) will typically be formulated to contain the additive(s) in proper amounts to provide the desired concentration, and/or to carry out the intended function in the final formulation when the additive package(s) is/are combined with a predetermined amount of base lubricant. Thus, additives (B) and (C), in accordance with the present invention, may be admixed with small amounts of base oil or other compatible solvents together with other desirable additives to form additive packages containing active ingredients in an amount, based on the additive package, of, for example, from 2.5 to 90, preferably from 5 to 75, most preferably from 8 to 60, mass % of additives in the appropriate proportions, the remainder being base oil.

25

The final formulations may typically contain about 5 to 40 mass % of the additive packages(s), the remainder being base oil.

30

The term 'active ingredient' (a.i.) as used herein refers to the additive material that is not diluent.

35

The terms 'oil-soluble' or 'oil-dispersable' as used herein do not necessarily indicate that the compounds or additives are soluble, dissolvable, miscible or capable of being suspended in the oil in all proportions. These do mean, however, that they are, for instance, soluble or stably dispersible in oil to an extent sufficient to exert their intended effect in the environment in which the oil is employed. Moreover, the additional incorporation of other additives may also permit incorporation of higher levels of a particular additive, if desired.

2000M005

The lubricant compositions of this invention comprise defined individual (i.e. separate) components that may or may not remain the same chemically before and after mixing.

5 Examples

The present inventions is illustrated by, but in no way limited to, the following examples.

10 Components

The components used in the examples were as follows.

Overbased Metal Detergents:

15

B1 - an overbased calcium salicylate having a TBN of 168, after dilution.

B2 - an overbased calcium salicylate having a TBN of 280, after dilution.

Anti-wear Additives

20

C1 - a zinc dialkyldithiophosphate (ZDDP) made from a primary C8 alcohol.

Other Components

25

T - antifoamant

Lubricant Compositions and Tests

30

Lubricant compositions as trunk piston marine diesel lubricating oils were prepared by admixing with a basestock the components B1 and B2 and component C1, and optionally component T, as identified above. The admixing was carried out by blending at elevated temperature. Two compositions were prepared to have the following formulations:

35

2000M005

<u>Component</u>	Oil 1	Oil 2
B1	10.10	12.50
B2	5.65	6.84
C1	0.61	0.61
T	10 ppm	-
Base Oil	Balance	balance
TBN	30	40

Unless otherwise stated, the figures above represent mass % values, based on the mass of the composition.

- 5 Oil 1 and Oil 2, being compositions of the invention, were tested as described below, as were the following comparison compositions, being at some stage commercially available.

- 10 Reference Oil 1: has a TBN of 30; comprises, as overbased detergent, a combination of calcium phenate and calcium sulfonate; as antiwear additive, a zinc dialkyldithiophosphate; and a polyalkenyl-substituted succinimide dispersant.

- Reference Oil 2: as Reference Oil 1 but having, as overbased detergent, a combination of calcium phenate, calcium salicylate and calcium sulfonate.

- 15 Reference Oil 3: as Reference Oil 1 having a TBN of 40.

- 20 Each of the above-described compositions was tested by using them to lubricate a Wartsila 4L20 trunk piston power generation 4-stroke, heavy fuelled, diesel engine for 500 hours. At the beginning of each test, engine components were clean and within the manufacturer's specification. At the end of each test, the pistons (4) were removed and examined as follows:

- 25 Rating (i) visually for ring grooves fillings to provide a percentage of the uppermost groove (Groove 1) and the next lower groove (Groove 2) that is filled with deposit;
- Rating (ii) visually for overall piston rating expressed as a weighted demerit according to the Caterpillar 1-K method; and

2000M005

Rating (iii) measuring the amount of deposit, expressed as its depth in microns as an area-weighted average, on the walls of the oil-cooling gallery (sometimes referred to as "undercrown", or UC, deposits").

- 5 Rating (i) and rating (ii) were performed according to the CRC rating procedure described in the CRC Manual No. 18 (1991), and rating (iii) was performed as described in the Wartsila - NSD procedure 'The Limits for Deposit Thicknesses and Component Wear in Connection with Lubricating Oil Approval Tests, MSLWD2.DOC (1<sup>st</sup> Feb. 1999)'. The results of rating (iii) provide an indication of
- 10 the ability of the composition to combat the "black paint" problem referred to hereinbefore.

### Results

- 15 The results of the above tests, reported as an average over the 4 cylinders, are summarised below:

<u>COMPOSITIONS</u>	<u>Rating (i)</u>		<u>Rating (ii)</u>	<u>Rating (iii)</u>
	<u>Ring Groove</u> <u>1</u>	<u>Ring Groove</u> <u>2</u>	<u>Demerit</u>	<u>UC Deposits</u>
Oil 1	6.25	0.00	381	25.90
Reference Oil 1	37.25	15.75	1,433	74.10
Reference Oil 1	4.25	5.00	1,066	67.40
Oil 2	0.00	0.50	527	21.60
Reference Oil 3	8.00	2.50	1,198	46.80

- 20 For each rating, lower values represent a superior performance. The results show that, for the compositions of TBN 30, the composition of the invention (Oil 1) is better in almost all tests than the comparison compositions (Reference Oils 1 and 2). They also show that, for compositions of TBN 40, the composition of the invention (Oil 2) is better in all tests than the comparison composition (Reference Oil 3).

25

2000M005

## Claims:

- 5 1. A trunk piston marine engine lubricating oil composition for a medium speed compression-ignited (diesel) marine engine wherein the composition is dispersant-free and has a Total Base Number (TBN) of 25 or greater, and comprises:
  - 10 (A) an oil of lubricating viscosity, in a major amount, and added thereto;
  - (B) an oil-soluble overbased metal detergent additive consisting of, as the sole metal detergent, one or more hydrocarbyl-substituted salicylates, in a minor amount, and
  - (C) an antiwear additive comprising a dihydrocarbyl dithiophosphate metal salt, in a minor amount
- 15 2. The composition as claimed in claim 1 further comprising a fuel oil with a residual fuel content, in a minor amount.
- 20 3. The composition as claimed in claim 1 or claim 2 having a TBN in the range of 25 to 100, such as 25 or 30 to 60.
- 25 4. The composition as claimed in any preceding claim wherein component (B) is present in the composition an amount in the range of 0.5 to 30 mass %.
- 30 5. The composition as claimed in any preceding claim where the one or more salicylates has or have a TBN in the range of 60 to 600, such as 100 to 450, preferably 160 to 400.
6. The composition as claimed in any preceding claim wherein the one or more salicylates is or are calcium salicylates.
7. The composition as claimed in any preceding claim wherein, in component (C), the metal salt is a zinc salt.
- 35 8. The use of additives (B) and (C) as defined in any of the preceding claims in a dispersant-free trunk piston marine engine oil lubricating composition having a TBN of 25 or greater to (a) suspend asphaltene components in

2000M005

the composition, or (b) control piston deposits, or both (a) and (b), when used in a medium speed compression-ignited marine engine .

- 5 9. A method of lubricating a medium speed compression-ignited marine engine which comprises supplying to the engine the truck piston marine engine oil lubricating composition as claimed in any of claims 1 to 7.



2000M005

## Abstract

Lubricating Oil Compositions

5 A trunk piston marine diesel engine lubricating oil composition is dispersant-free, has a TBN of 25 or greater, and comprises

- (A) an oil of lubricating viscosity,
- (B) a salicylate as the sole metal detergent, and
- 10 (C) a dithiophosphate metal salt antiwear additive

